

EVAPORATING FINISH STRIPPER

KE-26C

ELIMINATES COSTLY EQUIPMENT


Floor finish removal without a floor machine, stripping pads, or excessive rinsing

SAVES ON COSTLY LABOR

Penetrates and liquefies old floor wax

EVAPORATES QUICKLY LEAVES NO RESIDUE OF ALKALI FILM

30% stronger -- more effective than other no-rinse strippers

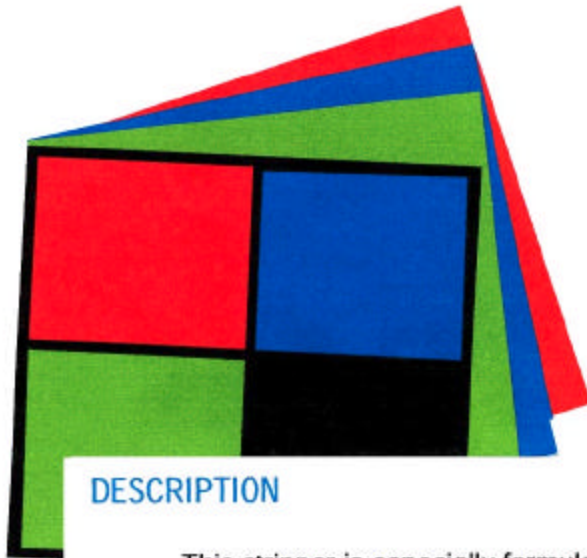

DESCRIPTION

This stripper is especially formulated to remove all types of floor waxes and finishes from all kinds of floors. It works in a new way to penetrate quickly the most stubborn wax and polymer finish films so they can be removed more readily.

APPLICATION

For use on all types of floors including:
Asphalt, Concrete, Marble, Quarry tile, Stone, Rubber,
Terrazzo, Vinyl, Vinyl Asbestos, Ceramic tile

DIRECTIONS FOR USE

Mix STRIPPER with warm (not hot) water. Hard water will not hamper stripper. Use the following dilutions (expressed as 1 part STRIPPER to x parts of water):
1 to 2 - For floors that have been badly neglected. 1 to 5 - For non-buffable, metal cross-linked polymer finishes or for very heavy buildup of finishes (1 gal of mix for 250 sq ft of floor). 1 to 10 - For buffable waxes and water-resistant waxes. 1 to 20 - For non-water resistant waxes. 1 to 40 - for new, previously unfinished floors to remove oily coatings placed there by the manufacturer.

- Soak (do not flood) an area not over 10 x 20 ft., and let stand for 5-10 minutes.
- Seal old or porous floor with a floor sealer before refinishing floor.

Kinzua Environmental, Inc., Cleveland, Oh. 44114, 800-233-5079