

CONCENTRATED AMONIATED STRIPPER

KE-26

HEAVY DUTY STRIPPER


Quickly penetrates through layers of old finish and wax and dissolves them for easy removal. Works on all kinds of floors; asphalt, rubber, vinyl asbestos, vinyl and clay tiles, linoleum, terrazzo and marble.

EVAPORATION CONTROL

Stripper's controlled evaporation ingredients hold old finishes on surface longer to help prevent redepositing and drying.

HARD WORKING FORMULA

Softens buildup of floor finish films, destroys the chemical bonding structure and emulsifies the fold finish for easy removal. This stripper keeps on working where other strippers leave off.

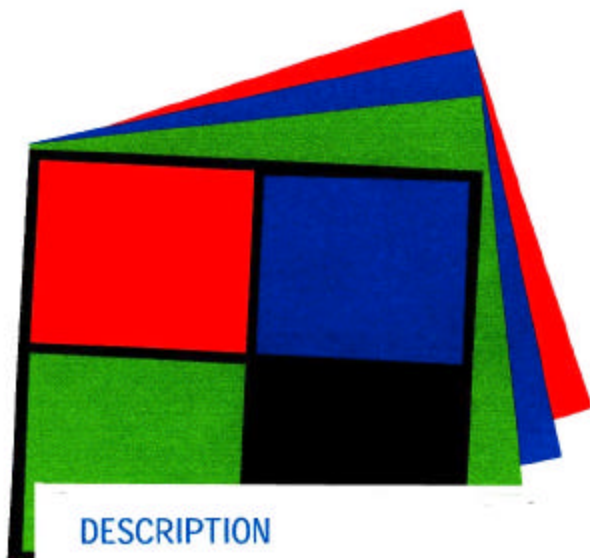

DESCRIPTION

Hi-tech. Aggressive. Made to remove urethane finishes. This no-rinse evaporating floor finish stripper has unusual penetrating and liquefying properties for removing finishes from floors quickly. When used as directed, this stripper will totally re-liquefy all old floor finish buildup and soil with the figurative speed of lightning. Floor finish removal is accomplished without the use of floor machines, stripping pads and excessive costly labor.

APPLICATION

For use on: (test in an inconspicuous section for color fastness of flooring)
Asphalt, Ceramic Tile, Concrete, Marble, Quarry tile, Rubber,
Slate, Stone, Terrazzo, Vinyl, Vinyl Asbestos

DIRECTIONS

Dilute product accordingly with hot water. Normal stripping: 1 part to 10 parts water (13 oz. per gal.). Aggressive stripping: 1 part to 5 parts water 26 oz. per gal.). Apply liberally with mop to floor. Be sure to leave surface very wet. Allow to remain 3-4 minutes and remop. Pick up solution using a wet vac. Allow floor to dry. No rinsing is necessary if treated surfaces appears free of dust after drying.

Kinzua Environmental, Inc., Cleveland, Oh. 44114, 800-233-5079