


**KE-3026 / KE-3026A  
KE-3026B / KE-3026C**

Data Sheet

## **ANTI-SEIZE COMPOUND**

---

---

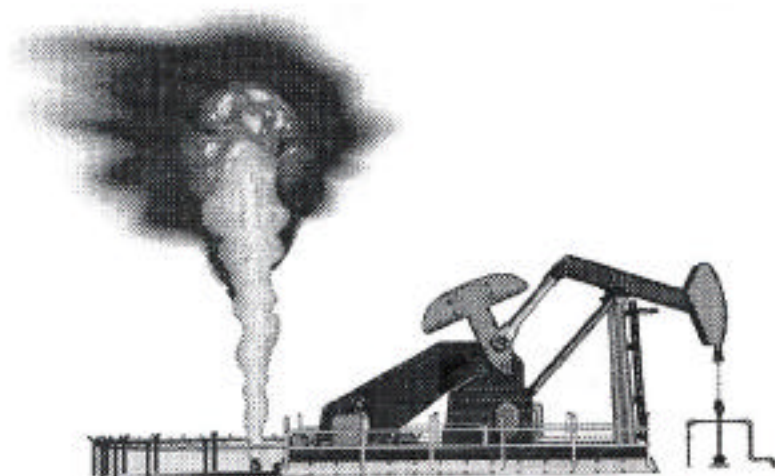

**RESISTS EXTREME  
TEMPERATURE  
AND  
PRESSURE**

**PREVENTS SEIZING, GALLING, PITTING  
GALVANIC ACTION and THREAD DISTORTION**

- SETS UP QUICKLY
- MAKES TIGHTER, FIRMER SEALS POSSIBLE
  - MAKES DISASSEMBLY EASIER BY  
REDUCING TORQUE REQUIREMENTS
- WILL NOT HARDEN, SEPERATE OR FUSE TO METALS  
EVEN UNDER SEVERE ATMOSPHERIC  
OR SALT SPRAY CONDITIONS
- EFFECTIVE AT TEMPERATURES UP TO 2100°F

**Kinzua Environmental, Inc.**  
Cleveland, Oh. 44114  
800-233-5079  
[www.kinzuachem.com](http://www.kinzuachem.com)

# KE-3026/3026A KE-3026B/3026C **ANTI-SEIZE COMPOUND**

product  
data  
sheet

## *Description*

An extreme temperature and pressure sealant and lubricant that protects metal from galling, seizing, or pitting. Reduces friction and wear, makes tighter, firmer joints possible that also open easier. Completely non-corrosive and inert to rubber. Effective on a broad group of metals with metal to metal and metal to rubber contact.

## *Use Anywhere*

MUNICIPALITIES  
REFINERIES • SHIPYARDS  
POWER GENERATING PLANTS  
INDUSTRIAL PLANTS • FACTORIES  
FOOD AND BOTTLING PLANTS  
STEEL MILLS • CHEMICAL PLANTS  
MINING OPERATIONS

## *For Use On*

ENGINES • MOTORS  
BEARINGS • GEARS  
TURBINES • COMPRESSORS  
PRODUCTION MACHINERY  
BOILERS • HEAT EXCHANGERS  
MANIFOLDS • EXHAUST SYSTEMS  
OIL and ORE DRILLS

## *Features*

**EXTREME TEMPERATURE AND PRESSURE RESISTANCE  
MAKES FOR EASIER ASSEMBLY AND DISASSEMBLY  
EXCELLENT RESISTANCE TO DAMP ATMOSPHERES,  
STEAM AND SALT SPRAY  
AVAILABLE IN AEROSOL or BRUSH TOP APPLICATOR**

## *Specifications*

Appearance and Odor .....	Copper(3036A) or Gray Viscous Liquid, Solvent Odor
Flash Point of Concentrate .....	34° F ( T.O.C. )
Flammability .....	Extremely-Flammable Spray
Specific Gravity .....	0.972
Propellant .....	Liquified Petroleum Gas
Spray Pattern .....	Coarse Circular Spray
NFPA Fire Rating .....	Level 3 Aerosol