


KE-3040

WHITE LITHIUM GREASE

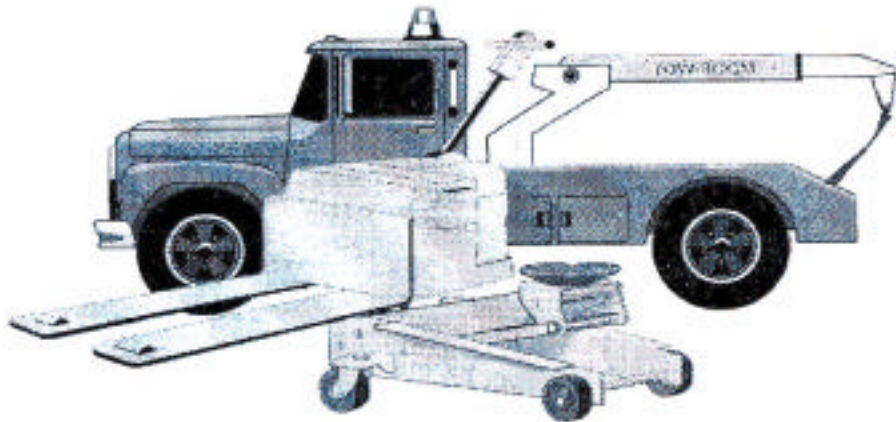

**DEEP
PENETRATING
ACTION
THEN SETS UP FAST**

CONTAINS NO CHLORINATED SOLVENTS

- A LIQUIDIFIED LITHIUM LUBRICANT THAT PENETRATES INTO GEARS AND MECHANISMS THEN SETS UP TO A THICK GREASE
- LONG LASTING WATER and DETERGENT RESISTANCE
- PREVENTS RUST
- EXTREME TEMPERATURE (FROM -60°F TO +500°F) and HIGH PRESSURE RESISTANCE

Kinzua Environmental, Inc.
Cleveland, Oh. 44114
800-233-5079
www.kinzuachem.com

KE-3040

aerosol
product
data
sheet

WHITE LITHIUM GREASE

Description

An all weather, heavy duty, multi-purpose penetrating grease. Sprays as a liquid, creeps to lubrication point like an oil, then cures to a thick, water resistant grease. Provides non-staining lubrication that guards surfaces against rust and corrosion. Heat stable to 350°F. Excellent for many industrial and automotive uses.

For Use by

AUTOMOTIVE REPAIR
INDUSTRIAL OPERATIONS
HOT AIR DRYING OPERATIONS
BAKERIES • MARINAS • SHIPPING
AIRCRAFT MAINTENANCE
PACKAGING and MOLDING OPERATIONS
SHIPPING OPERATIONS

For Use On

HOISTS • THREADS • ROLLERS
CAMS • SLIDE BEARINGS • O-RINGS
CONVEYORS • CHAIN DRIVES
FITTINGS • LINKAGES • WIRE ROPE
OVENS • DRYERS • GEARS
VALVES • PUMPS • WINCHES
MANIFOLD HEAT VALVES

Features

EXTREME TEMPERATURE (-60°F TO +500°F)
HIGH PRESSURE RESISTANCE
HOLDS UP UNDER HIGH SHOCK LOADS
REDUCES FREQUENCY OF LUBRICATION
PENETRATES DEEPLY INTO DIFFICULT TO LUBRICATE PLACES
RESISTS ACIDS, OXIDATION, DIRT AND SALT SPRAY

Specifications

Appearance and Odor	Tan, Opaque, Viscous Liquid, Solvent Odor
Flash Point of Concentrate	51°F(T.O.C.)
Flammability	Extremely-Flammable Spray
Specific Gravity	0.803
Propellant	Liquid Petroleum Gas
Spray Pattern	Coarse Spray
NFPA Fire Rating	Level 2 Aerosol