

KE-4020



SPECIALTY MAINTENANCE


Seals Against Heat and Cool Air Loss
Helps Prevent Rodent Entrance

NON-FLAMMABLE

E-X-P-A-N-D-A-B-L-E INSULATING FOAM SEALANT

Fills, Seals, Plugs, Bonds, Insulates

- Expands 200 - 300%
- Air Tight • Water Resistant
- Seals Against Heat or Cool Air Loss
- Helps Cut Energy Costs
- Contains a Flame Retardant
- Dries Tack-Free in 15 - 30 Minutes

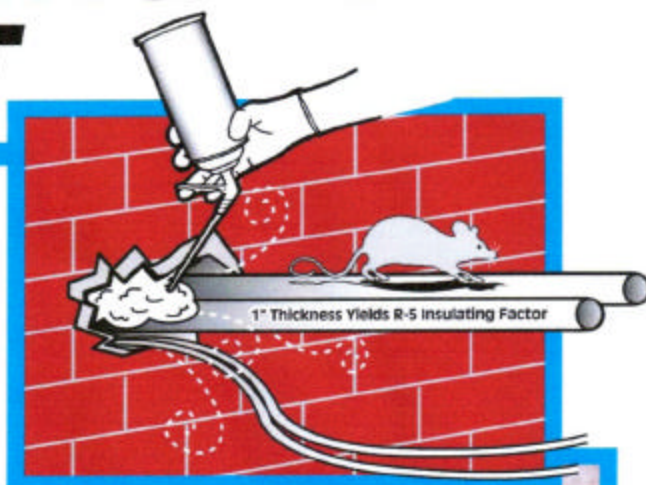

A convenient aerosol that dispenses a one part, liquid urethane foam which expands 200 to 300% and cures to a durable, hard foam, insulating sealant. Fills large cracks and holes that caulk cannot. Forms an airtight, water resistant and weather resistant bond on surfaces such as masonry, wood, metal, glass, tile, and most plastics. Helps eliminate energy escape. Prevents the entrance of insects and rodents. Dries tack-free in 15 to 30 minutes and cures completely in 8 to 24 hours, depending on humidity. Easy to apply. Conforms to any shape.

APPROVALS / STANDARDS:

UL 723 -

ASTM E-84 (12.5%)

Flame Spread 25

Smoke Developed 50

CCMC 07911

NFPA 30B Classification: Level 1 Aerosol

USED BY:

- Heating, Ventilation and A/C Trades
- Plumbers • Building Superintendants
- Construction Crews • HVAC Trades
- Automotive Customizing • Boat Builders
- Restaurants • Hotels • Motels • Hospitals
- Nursing Homes • Industrial Plants
- Factories • Steel Mills • Chemical Plants

Kinzua Environmental, Inc.
Cleveland, Oh. 44114
800-233-5079
www.kinzuachem.com